



CERTIFICATE OF APPROVAL

No CAF 206

This is to certify that, in accordance with
TS00 General Requirements for Certification of Fire Protection Products
The undermentioned products of

**Designated CERTIFIRE Approved Door and Blank Manufacturers
as Converted by**

W. HOWARD LIMITED

**Lower Green Lane, Astley, Manchester M29 7JZ, United Kingdom
Tel: 01942 881900 Fax: 01942 891544**

Have been assessed against the requirements of the Technical Schedule(s)
denoted below and are approved for use subject to the conditions
appended hereto:

SCOPE OF APPROVAL

Approved for the manufacture of
MDF door frames for use with
specified CERTIFIRE approved
fire doors

TECHNICAL SCHEDULE

TS10 Fire Resisting Door
Assemblies with non- Metallic
Leaves

Signed and sealed for and on behalf of Warringtonfire Testing and Certification Limited

Paul Duggan
Certification Manager

Issued:	3 rd November 2008
Reissued:	12 th July 2024
Next audit test due:	19/03/2024
Frequency:	Every 5 years
Valid to:	30 th September 2024





CERTIFICATE No CAF 206

W. HOWARD LIMITED

DOOR FRAMES

1. This approval relates to the manufacture of door frames for use with specified CERTIFIRE approved fire doors. Subject to the undermentioned conditions, the doors when fitted in the frame and with hardware and seals specified in this certificate are designed to meet the requirements as detailed in the relevant certificates.
2. This certification is provided to the client for their own purposes and we cannot opine on whether it will be accepted by Building Control authorities or any other third parties for any purpose.
3. All frames shall be manufactured in accordance with the frame specification as defined in Figure 1. The frames shall be of the following specification:
 - Type 1 – Twice primed, moisture resistant MDF
 - Type 2 – Wood veneered, moisture resistant MDF
4. The frames are approved for use with
CERTIFIRE approved FD30 single-acting, single leaf, latched doorsets of maximum leaf dimensions 2040 mm high by 926 mm wide and of minimum thickness 44 mm. The doorset assemblies shall consist of timber faced and edged leaves with timber, cellulosic or mineral cores in timber frames (Code ITT).

Only doors as indicated in Table 1 are approved for installation in W. Howard FD30 MDF frames.

For any other door types/configurations, please refer to the door manufacturers CERTIFIRE Data Sheet and detailed installation instructions.
5. Processing is conducted in accordance with W. Howard procedures.
6. The process is approved on the basis of on-going certification of quality management system to ISO 9001.
7. Inspection and surveillance of factory production control.
8. The approval relates to on-going production.
9. Approved frames carry a label identified with W. Howard's name and contact number, the CERTIFIRE name, or name and mark, together with the CERTIFIRE certificate number and a unique serial number.


Signed
E/302

Issued: 3 November 2008
Reissued: 12th July 2024
Valid to: 30th September 2024

CERTIFICATE No CAF 206 W. HOWARD LIMITED

DOOR FRAMES

Figure 1 – Details for MDF Door Frames

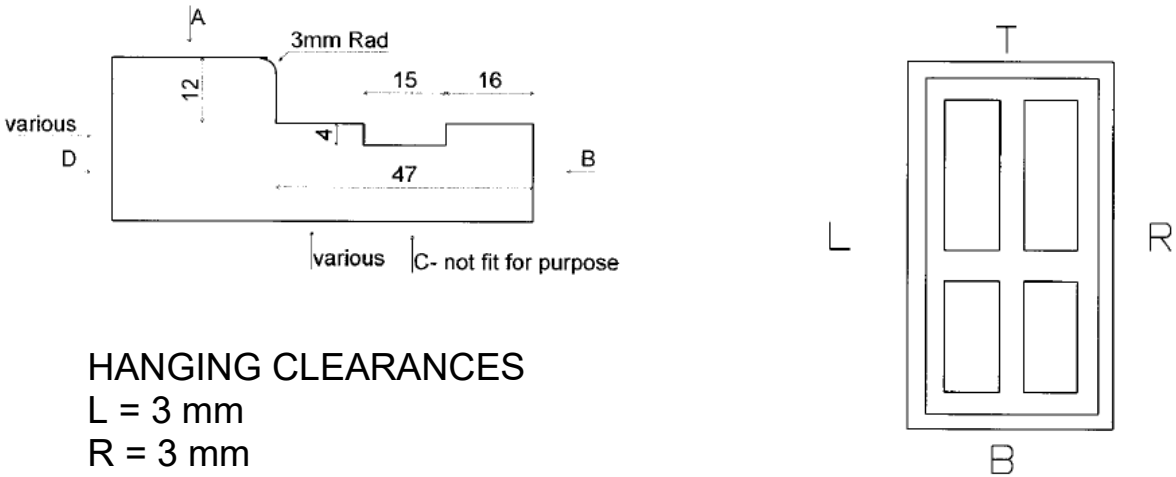

HANGING CLEARANCES

- L = 3 mm
- R = 3 mm
- T = 3 mm
- B = 6 mm (Note: Frames may be supplied over length to facilitate installation.)



Signed E/302 *Paul Rogers*

Issued: 3 November 2008
Reissued: 12th July 2024
Valid to: 30th September 2024

CERTIFICATE No CAF 206 W. HOWARD LIMITED

DOOR FRAMES

Figure 2 – Details for MDF Door Frames

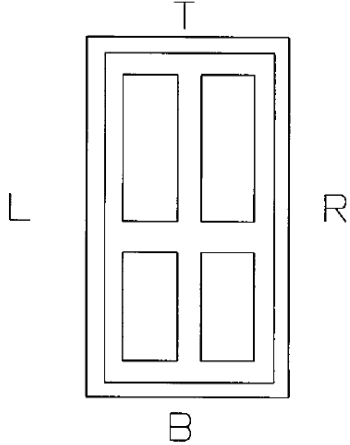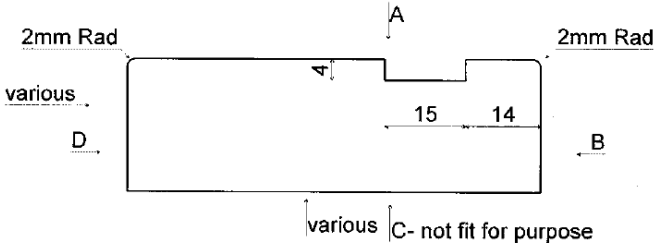

HANGING CLEARANCES

L = 3 mm

R = 3 mm

T = 3 mm

B = 6 mm (Note: Frames may be supplied over length to facilitate installation.)

Signed
E/302

Issued: 3 November 2008
Reissued: 12th July 2024
Valid to: 30th September 2024

CERTIFICATE No CAF 206 W. HOWARD LIMITED

DOOR FRAMES

Table 1 – Applicable Door Certificates

(NOTE: Only FD30 doors as indicated below in Table 1 should be installed in W. Howard FD30 MDF frames)

Certificate	Company
CF433	Corinthian Industries
CF435	Halspan
CF534	Halspan
CF154	J B Kind Limited & IRMADE
CF160	JELD-WEN
CF192	JELD-WEN
CF572	JELD-WEN
CF573	JELD-WEN
CF5143*	JELD-WEN
CF195	Premdor Crosby
CF198	Premdor Crosby
CF240 (FD30 Premcore only)	Premdor Crosby
CF380	Premdor Crosby
CF625	Premdor Crosby
CF218	Vicaima Limited

NOTE:

- **Applicable door configurations are FD30 single-acting, single leaf, latched doorsets of maximum leaf dimensions 2040 mm high by 926 mm wide and of minimum thickness 44 mm**

* MDF frames suitable for use with door leaves fitted with a single point latch / lock only (multipoint locks not permitted)

Signed
E/302



Issued: 3 November 2008
Reissued: 12th July 2024
Valid to: 30th September 2024



CERTIFICATE No CAF 206 W. HOWARD LIMITED

DOOR FRAMES

Scope of Approval:

- CERTIFIRE approved intumescent seals are supplied pre-fitted into the frames. They should not be removed or replaced with any other seals. Where smoke seals are specified then additional CERTIFIRE approved seals will be supplied.
- The hinges supplied with the frames are CE marked for use on timber fire doors and should not be changed for alternative items.
- It is recommended frames and doors are installed by fully trained FIRAS accredited installers.

Further Information

Further information regarding the details contained in this data sheet may be obtained from W. Howard (Tel: 01942 881900).

Further information regarding the CERTIFIRE certification and other approved products can be obtained from CERTIFIRE (Tel: 01925 646777).

Further information regarding BWF labelling requirements can be obtained from the British Woodworking Federation (Tel: 0844 209 2610).

Further information regarding the accreditation scheme for installers of fire resisting door kits can be obtained from FIRAS (Tel: 01925 646666).

Signed
E/302

Issued: 3 November 2008
Reissued: 12th July 2024
Valid to: 30th September 2024